


Appliance data

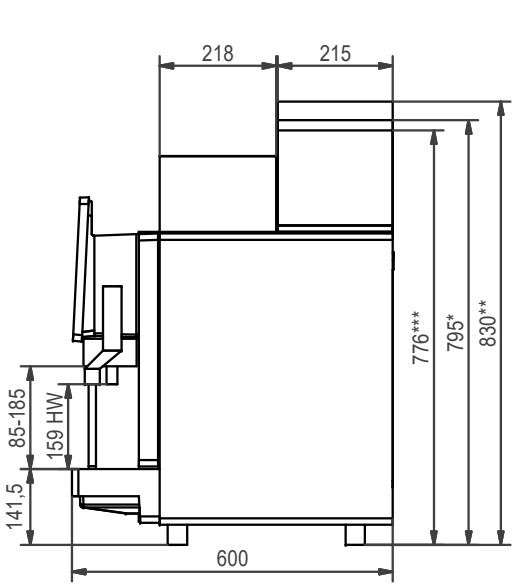

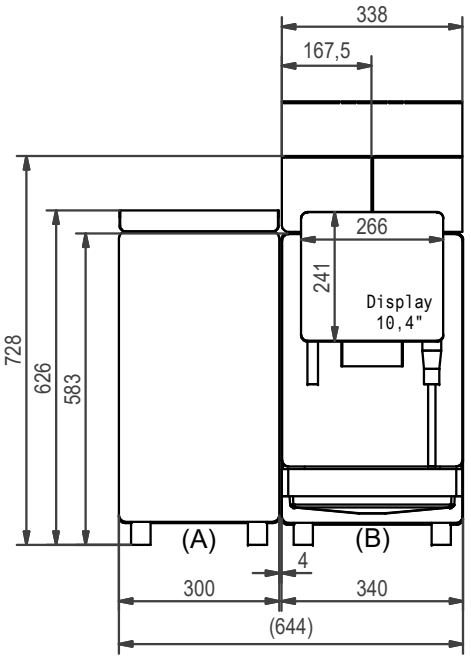

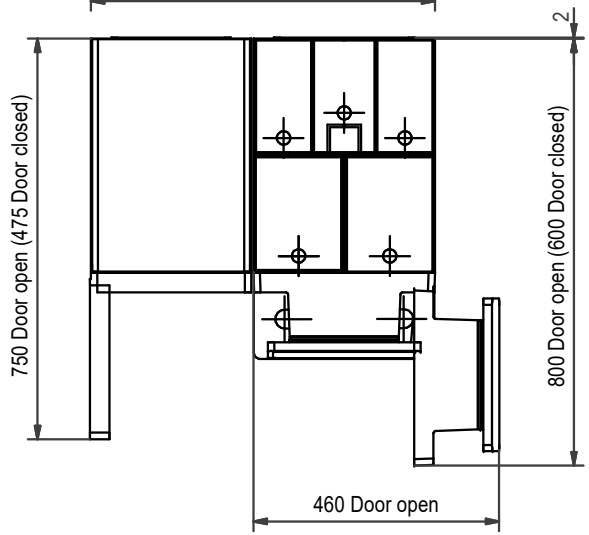

Option adjustable feet:
Appliance hights with 1 Type of beans rear*:
Adjustable feet 40 mm = 795 mm
Adjustable feet 70 mm = 820 mm to 830 mm
Adjustable feet 100 mm = 851 mm to 861 mm

Appliance hights with 2 Types of beans rear*:**
Adjustable feet 40 mm = 776 mm
Adjustable feet 70 mm = 801 mm to 811 mm
Adjustable feet 100 mm = 832 mm to 842 mm

Appliance hights with 3 Types of beans rear:**
Adjustable feet 40 mm = 830 mm
Adjustable feet 70 mm = 855 mm to 865 mm
Adjustable feet 100 mm = 886 mm to 896 mm

Technical Data:
(A) SU06 Plus/Pro:
- Energy loss:
  380,4 Wh/24h with 230 V according to DIN 18873-2
- Net weight: max. 32 kg
- Main power connection:
  220-240 V, 1LNPE, 1 A, 10 A, 50-60 Hz - CH/EU/GB
  100-127 V, 1LNPE, 2 A, 10 A - US
  100 V, 1LNPE, 2 A, 10 A - JP
- Noise emission: < 70 dB (A)
- Ingress protection: IPX0
- Approvals: CE/CB/HACCP
  (Typ FCS4088)

(B) A600 FM Plus/Pro:
- Energy loss:
  1,637 kWh/24h with 230 V according to DIN 18873-2
  (energy loss corresponds to the heat output)
- Net weight: max. 58 kg
- Main power connection:
  220-240 V, 1LNPE, 2900-3400 W, 16 A, 50-60 Hz - CH/EU/GB
  200-220 V, 2L PE, 4700-5600 W, 30 A, 60 Hz - US
  200-220 V, 2L PE, 4700-5600 W, 30 A, 50-60 Hz - JP
- Noise emission: < 70 dB (A)
- Ingress protection: IPX0
- Main water connection:
  Inlet hose: 6 mm x 11,2 mm 1500 mm
  2x union nut G3/8"
  Wastewater hose: 14,5 mm x 20 mm x 2000 mm
- Approvals: CE/CB/HACCP
  (Typ FCS4086)

Franke Kaffeemaschinen AG
Franke-Strasse 9
CH-4663 Aarburg
Telefon: +41 62 787 3607
E-Mail: kmch@franke.com
Internet : www.franke.com

These drawings and specifications are the property of Franke Technology and Trademark Ltd. and shall not be reproduced, copied or transfered to any third party without the prior written permission of Franke Technology and Trademark Ltd., Hergiswil, Switzerland

Unit: mm	Scale: NTS	Description: TD_N_A600_FM_SU06_en		
Drawn: MB002 10.12.2025				
Modified: MB002 10.12.2025				
Checked: 01.01.1970				
ECN: 500000001512	Document ID - Version: 20292512-01	Revision	Status: 15	Sheet / Sheets: 1 /4	Format: A3
Article Number				

Installation notes

Installation notes on site:

WW1 - A600 FM Plus/Pro (B):
DN50 funnel siphon ventilated
FW1 - A600 FM Plus/Pro (B):
Main water connection G3/8A, shut-off valve
check valve, filter and aquastop
E1* - SU06 Plus/Pro (A):
220-240 V, 1LNPE, 1 A, 10 A, 50-60 Hz - CH/EU/GB
100-127 V, 1LNPE, 2 A, 10 A, 60 Hz - US
100 V, 1LNPE, 2 A, 10 A, 50-60 Hz - JP
E2* - A600 FM Plus/Pro (B):
220-240 V, 1LNPE, 2900-3400 W, 16 A, 50-60 Hz - CH/EU/GB
200-220 V, 2L PE, 4700-5600 W, 30 A, 60 Hz - US
200-220 V, 2L PE, 4700-5600 W, 30 A, 50-60 Hz - JP
CC1 - A600 FM Plus/Pro (B):
Option container for coffee grounds ejection
CG1 - A600 FM Plus/Pro (B):
Option tube for coffee grounds ejection
HH1 - A600 FM Plus/Pro (B):
Holder for hoses
(in scope of delivery)
WF1 - A600 FM Plus/Pro (B):
Option water filter
*Soket with RCD (residual current device)

IoT Digital Services - Option:


Power supply:
By the coffee machine
Internet connection:
Sufficient network coverage** or data sockets**
Modem and SIM-Card in scope of delivery
Alternatively:
Customer own modem**
**on site by customer!


Water supply:

Water pressure:	80-800kPa; 0,8-8,0bar
Flow rate:	>0,1l/sec.
Water temperature:	<25°C

Water quality:


Water hardness:	4-8°dH; 7-14fH 4,2-8,3GPG; 70-140ppm (mg/l)
Carbon hardness:	3-6°dH; 50-105ppm (mg/l)
pH-Value:	6,5-7,5pH
Chlorine content:	<0,5mg/l
Chloride content:	<30mg/l
TDS (total desolved solids):	30-150ppm (mg/l)
El. conductivity:	50-200µS/cm
Iron content:	<0,3mg/l

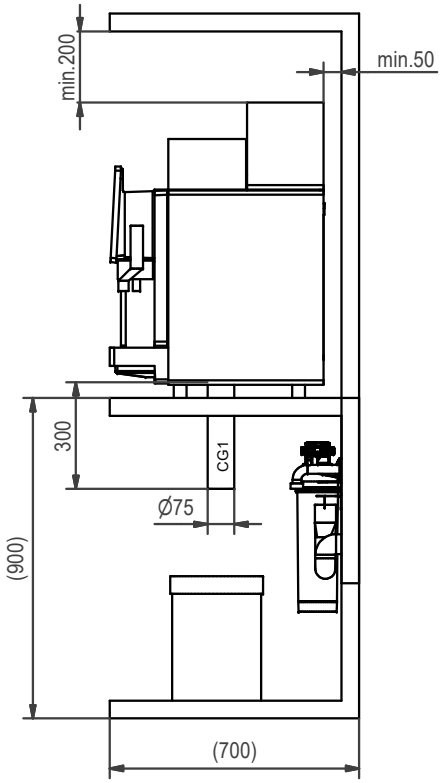

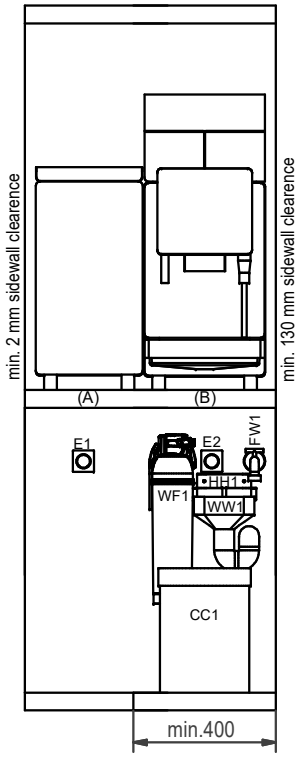

Franke Kaffeemaschinen AG Franke-Strasse 9 CH-4663 Aarburg Telefon: +41 62 787 3607 E-Mail: kmch@franke.com Internet : www.franke.com	Unit: mm	Scale: NTS	Description: TD_N_A600_FM_SU06_en		
	Drawn: MB002 10.12.2025				
	Modified: MB002 10.12.2025				
	Checked: 01.01.1970				
These drawings and specifications are the property of Franke Technology and Trademark Ltd. and shall not be reproduced, copied or transfered to any third party without the prior written permission of Franke Technology and Trademark Ltd., Hergiswil, Switzerland	ECN: 500000001512	Article Number:	Document ID - Version: 20292512-01	Revision:	Status: 15 / Sheet / Sheets: 2 /4 / Format: A3

Counter drillings and feet positions of the appliances

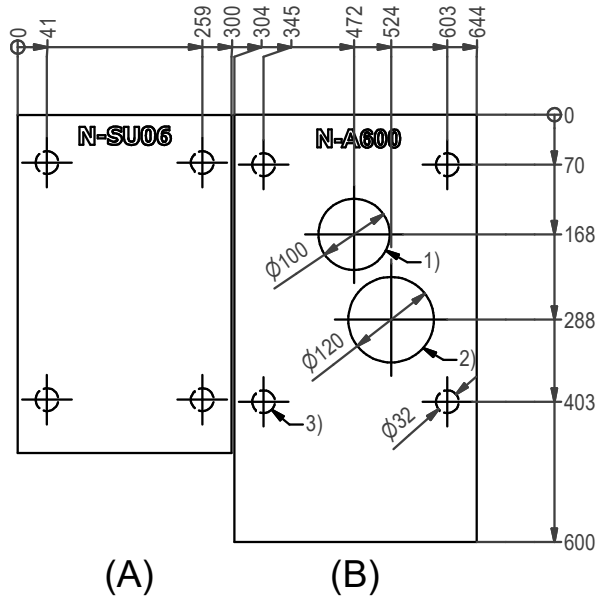

Positions:

Pos. 1) 1x Drilling
- Supply lines - A600 (B) SU06 (A)

Pos. 2) 1x Drilling (Option)
- Coffee grounds ejection - A600 (B)


Pos. 3) 8x Surface
- Feet of the appliances

Franke Kaffeemaschinen AG
Franke-Strasse 9
CH-4663 Aarburg
Telefon: +41 62 787 3607
E-Mail: kmch@franke.com
Internet : www.franke.com

These drawings and specifications are the property of Franke Technology and Trademark Ltd. and shall not be reproduced, copied or transfered to any third party without the prior written permission of Franke Technology and Trademark Ltd., Hergiswil, Switzerland

Unit: mm	Scale: NTS	Description: TD_N_A600_FM_SU06_en					
Drawn: MB002 10.12.2025							
Modified: MB002 10.12.2025							
Checked: 01.01.1970							
ECN: 500000001512	Article Number:	Document ID - Version: 20292512-01	Revision:	Status: 15	Sheet / Sheets: 3 /4	Format: A3	

Location

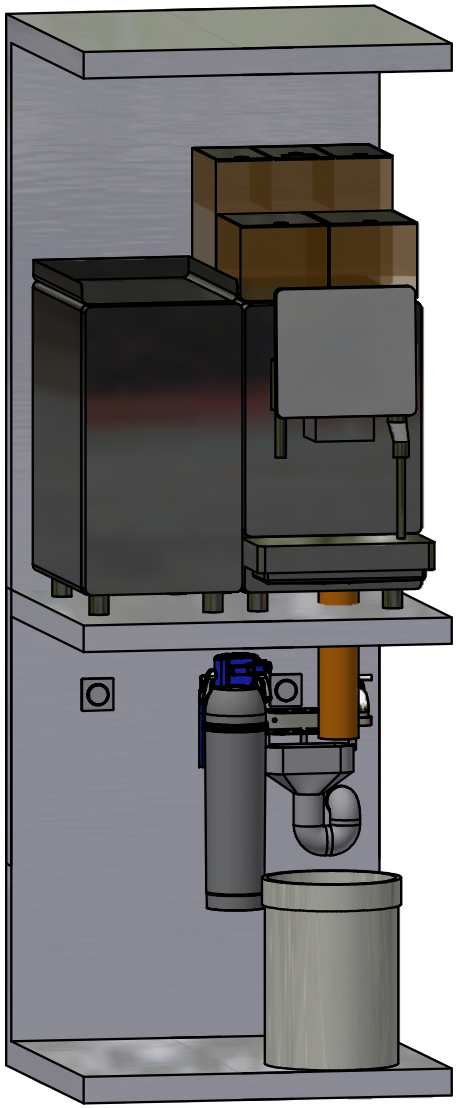

Installation requirements:

- All appliances delivered ready for connection.

- First the preparations for the connections of water and electricity must be complete. Distance max. 1 m up to the device.

- Counter feedthrougs must also be present before installation, if necessary.

- This preparation-works must be performed by qualified specialists in accordance with applicable regulations.

- The on-site connections must comply with the applicable local and national rules and regulations as well as the on-site installation indications.

- They have to be installed on a flat surface.

- The appliances are intended exclusively for operation in interior rooms.

- Ambient temperatur: 5°C - 32°C.

- Humidity: max. 80%

Franke Kaffeemaschinen AG
Franke-Strasse 9
CH-4663 Aarburg
Telefon: +41 62 787 3607
E-Mail: kmch@franke.com
Internet : www.franke.com

These drawings and specifications are the property of Franke Technology and Trademark Ltd. and shall not be reproduced, copied or transfered to any third party without the prior written permission of Franke Technology and Trademark Ltd., Hergiswil, Switzerland

Unit: mm		Scale: NTS	Description: TD_N_A600_FM_SU06_en				
Drawn	MB002	10.12.2025					
Modified	MB002	10.12.2025					
Checked		01.01.1970					
ECN	500000001512		Document ID - Version: 20292512-01	Revision	Status: 15	Sheet / Sheets: 4 /4	Format: A3
Article Number							